

This presentation should not be considered a final statement of NIOSH policy or of any agency or individual who was involved. This information is intended for use in advancing knowledge needed to protect workers. Comments regarding this presentation may be submitted to the NIOSH Docket Office.

# **Workplace Breathing Rates: Defining Anticipated Values and Ranges**

**David Caretti**

**Research Physiologist**

**Edgewood Chemical Biological Center**

**4 May 2004**



# Background

- **Objectives**

- Define ventilatory parameters based on real-world work rates
- Examine both non-respirator and respirator conditions
- Establish flow rates for assessing filter/respirator performance

- **Approach**

- Literature review
- Compile/analyze data from government/non-government sources
- Human use testing (lab and/or worksite)



# Literature Review

- **Objectives**

- Review concepts of respiration pertinent to respirator certification
- Evaluate methods for quantifying ventilation
- Define maximal ventilation rates
- Address speech ventilation rates
- Describe ventilation rates reported for occupational activities
- Review the impacts of respirator wear on ventilation



# Literature Review

- **Summary Information**

- 155 papers reviewed/cited
  - 9 with workplace or simulated workplace data
  - 7 with workplace data during respirator wear
- Limited empirical data to meet objectives
- Adopted approach for estimating minute volumes from energy expenditure literature
  - Relationship between ventilation and oxygen usage
  - 2 exponential functions utilized to derive a range of predicted volumes
  - Assumptions and limitations defined




# Literature Review

- **Summary Information (continued)**

- Peak inspiratory flow literature
  - Determined prediction intervals for peak flows based on limited empirical data
  - Estimates of upper and lower boundaries for PIF for any given minute volume
  - Defined assumptions and limitations
- Respirator wear and ventilation
  - Changes from non-masked conditions
  - Addressed for broad respirator categories
    - APR
    - Supplied air/PAPR
    - SCBA
- Initial paper draft provided to NIOSH for review Mar 04



# Literature Review: Results

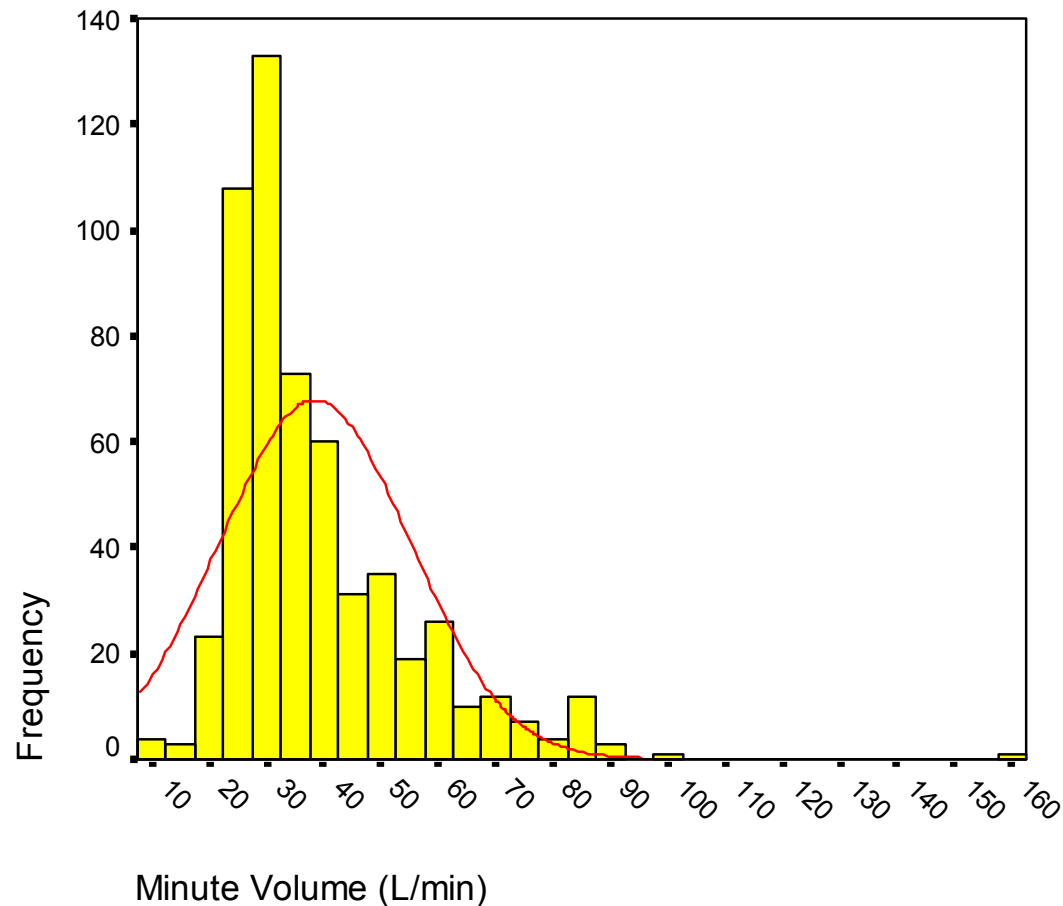

Distribution of ventilation rates measured or estimated from occupational activity literature fitted with a normal distribution.



# Literature Review: Results

## Occupational activities:

- **Minute volume distribution**
  - Mean =  $38.5 \pm 16.6 \text{ L}\cdot\text{min}^{-1}$  ( $n = 565$ )
  - Median =  $33.6 \text{ L}\cdot\text{min}^{-1}$
  - 95<sup>th</sup> percentile =  $73.3 \text{ L}\cdot\text{min}^{-1}$
  - Peak =  $162 \text{ L}\cdot\text{min}^{-1}$
- **Peak flow ranges based on minute volumes**
  - Mean  $V_E$  : 72 to  $183 \text{ L}\cdot\text{min}^{-1}$
  - 95<sup>th</sup> percentile  $V_E$  : 182 to  $295 \text{ L}\cdot\text{min}^{-1}$
  - Peak  $V_E$  : Estimation not valid for  $V_E$  over  $\sim 120 \text{ L}\cdot\text{min}^{-1}$



# Literature Review: Results

## Human performance literature:

- **Maximal  $V_E$** 
  - Males (20-29 yr) =  $114 \pm 23 \text{ L}\cdot\text{min}^{-1}$
  - Females (20-29 yr) =  $87 \pm 17 \text{ L}\cdot\text{min}^{-1}$
  - Extremes of 180 to 200  $\text{L}\cdot\text{min}^{-1}$
- **Peak flow rates**
  - Maximum exercise values as high as  $\sim 300 \text{ L}\cdot\text{min}^{-1}$
  - Peak in-house value  $\sim 485 \text{ L}\cdot\text{min}^{-1}$  during hard work
  - Speech values not substantially different





# Conclusions

- **Occupational  $V_E$  rarely approach  $V_E$  max values**
  - 73 L·min<sup>-1</sup> sufficiently represents the upper limit of minute volumes anticipated in the workplace
  - 114 L·min<sup>-1</sup> reasonable estimate for  $V_E$  max
- **Peak inspiratory flows**
  - High end predictions based on  $V_E$  correspond with literature
  - Suggest upper limit of 430 L·min<sup>-1</sup> based on  $V_E$  max of  $114 \pm 23$  L·min<sup>-1</sup>
- **Higher  $V_E$  and peak flows will occur!**
  - Literature suggests such instances are not the norm



# Conclusions

- **Respirator wear**

- Minute volumes and peak flows generally lower during intense work for APR and SCBA
- SAR/PAPR impact ventilation to a lesser degree

- **Implications toward respirator standards**

- Better representation of occupational ventilation rates:
  - Adopt values based on 95<sup>th</sup> percentile  $V_E$  (73 L·min<sup>-1</sup>)
- Greater range of human ventilation:
  - Adopt values based on  $V_E$  max of 114 L·min<sup>-1</sup>
- Other factors involved:
  - Cyclic flows vs. constant flows?
  - Contaminant exposure levels?



# Data Compilation

- **Objectives**


- Obtained raw ventilation data from recent respirator studies
- Validate/update current knowledge on ventilation during respirator wear
- Identify data gaps for further research

- **Status**

- Data obtained from 3 sources; anticipate input from 1 additional investigator
- Database variables defined; database partially populated
- Currently reviewing new dataset
- Analysis of data will be initiated once database is complete



# Data Compilation: Sample

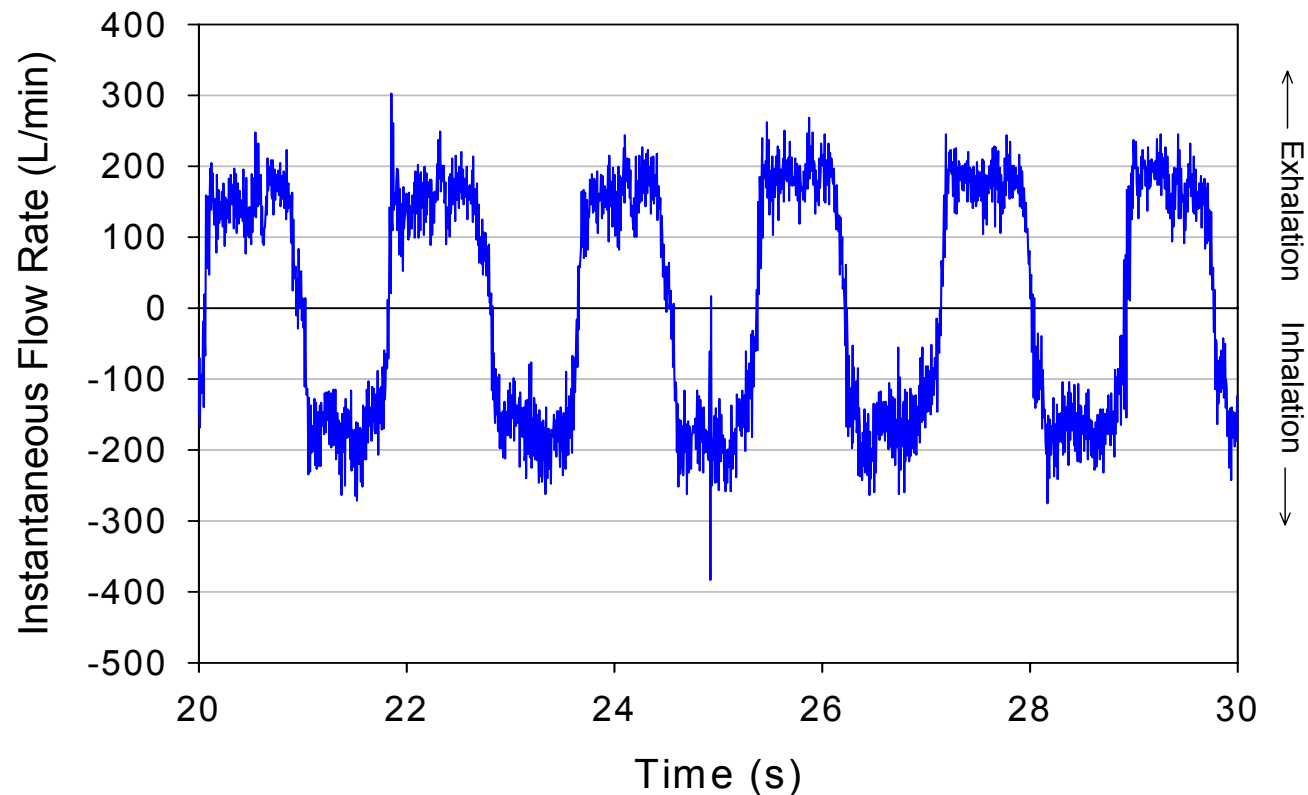

TI	TE	f	VT	VI	VT/TI	TI/TTOT	PIFR	PEFR	PIFR/VE	PEFR/VE
(s)	(s)	(1/min)	(L)	(L/min)	(L/s)		(L/min)	(L/min)		
0.94	0.82	34.01	2.16	73.52	2.30	0.53	271.49	302.67	3.69	4.12
1.00	0.84	32.72	2.35	76.94	2.36	0.54	262.26	243.96	3.41	3.17
0.89	0.82	34.93	2.16	75.45	2.42	0.52	383.51	268.75	5.08	3.56
0.86	0.92	33.79	2.42	81.92	2.82	0.48	263.58	245.27	3.22	2.99
0.89	0.89	33.57	2.43	81.58	2.72	0.50	275.44	245.27	3.38	3.01



# Respirator Wear Testing

- **Recommendations based on:**
  - Literature review
    - Investigate the relationship between ventilation and oxygen usage on a population of respirator users
    - Measure workplace ventilation rates during respirator wear
  - Compiled data
    - To be determined



# Project Milestones

- **Completed**

- Literature review report Mar 04
- Provided flow rates for NIOSH sponsored high flow filter testing Mar 04

- **In progress**

- Publish literature review report May 04
- Complete compiled data analysis Jun 04
- Provide final flow rate recommendations Aug 04

